EVO.LINE

DRYING SOLUTION

LINEA PRO*Easy*Line | PELD 65 | PELD 80

PROFESSIONAL DRYERS PRO*EASY*LINE 6-8 kg







Plus PEL D Line

Easy-to-use programming display

10 programs and 25 languages available

Compact machine suitable for home installation stackable with PRO*EASY*LINE dryer

"BUTTERFLY" drum rotation system

Residual moisture sensor on automatic programmes

Stainless steel AISI 304 top, front and drum

Large filter mounted on front door

The HEAT PUMP model can also be installed in confined, closed and poorly ventilated space

All components over 50g in weight are recyclable

15.000 tested cycles

PELD65 EE and PELD80 HP models are delivered with energy certification

Scan for more info

OPTIONS AND ACCESSORIES

- Crankase h 300 mm.
- Electronic coin or token mechanism for self-service version.
- Tokens for coin-boxes for Self Service use (pack of 250 pcs.).
- Ready for centralised cashbox.


NOTE: The images in this document are for illustrative purposes only. The appearance, equipment and details of the actual product may vary without notice.

IMESA designing your clean

TECHNICAL DATA	PELD 65 C	PELD 65 EE
• Capacity 1:18 - 1:20	6,5 - 6 Kg (14 - 12 lb)	6,5 - 6 Kg (14 - 12 lb)
• Drum volume	117 lt	117 lt
• Hater type	Electric	Electric
• Door hinge position	Right (Reversible)	Right (Reversible)
• Vent air\smokes Ø (if foreseen)	-	102 mm
• Exhaust air flow (Version EE)	-	160 mc/h
• Max counterpressure EE (Version EE)	-	84,1 Pa
• Machine dimensions: WxDxH (100 mm = 3.93 inch.)	595×654×850-865 mm	595×769×850-865 mm
• Net weight	42,8 Kg (94 lb)	37,4 Kg (93,4 lb)
• Packing dimension: WxDxH (100 mm = 3.93 inch.)	640×723×920 mm	640×730×920 mm
• Gross weight	47,2 Kg (104 lb)	41,8 Kg (92 lb)
• Packaging volume	0,43 mc (15.2 ft³)	0,43 mc (16.9 ft³)
• Supply cable length	2100 mm (82.7 inch.)	2100 mm (82.7 inch.)
• STD. packed machines in to 20' container	54 pz. Stacked	54 pz. Stacked
• STD. packed machines in to 40' container	108 pz. Stacked	108 pz. Stacked

Variant (code)	65EE / 65C A / A	65EE / 65C E / E[b]	65EE / 65C G / G[b]	65EE / 65C H / H[b]	65EE / 65C I / I[b]
• Electrical connection	1ph 230 V / 1ph 230 V 50 Hz 50 Hz	3ph 440 V / 2ph 440 V 60 Hz 60 Hz	3ph 440 V / 2ph 440 V 50 Hz 50 Hz	3ph 440 V / 2ph 440 V 60 Hz 60 Hz	1ph 230 V / 1ph 230 V 60 Hz 60 Hz
• Plug	Schuko	N/A	N/A	N/A	Schuko
• Installation electrical power (kW)	3,3 / 2,8	3,3 / 3,3	3,3 / 3,3	3,3 / 3,3	3,3 / 2,8
• Current (A)	16 / 16	10 / 10	10 / 10	10 / 10	16 / 16
• External transformer's box	- / N/A	- / Yes	- / Yes	- / Yes	- / Yes

External transformer's box dimension (where applicable) WxDxH: 286×226×210 mm

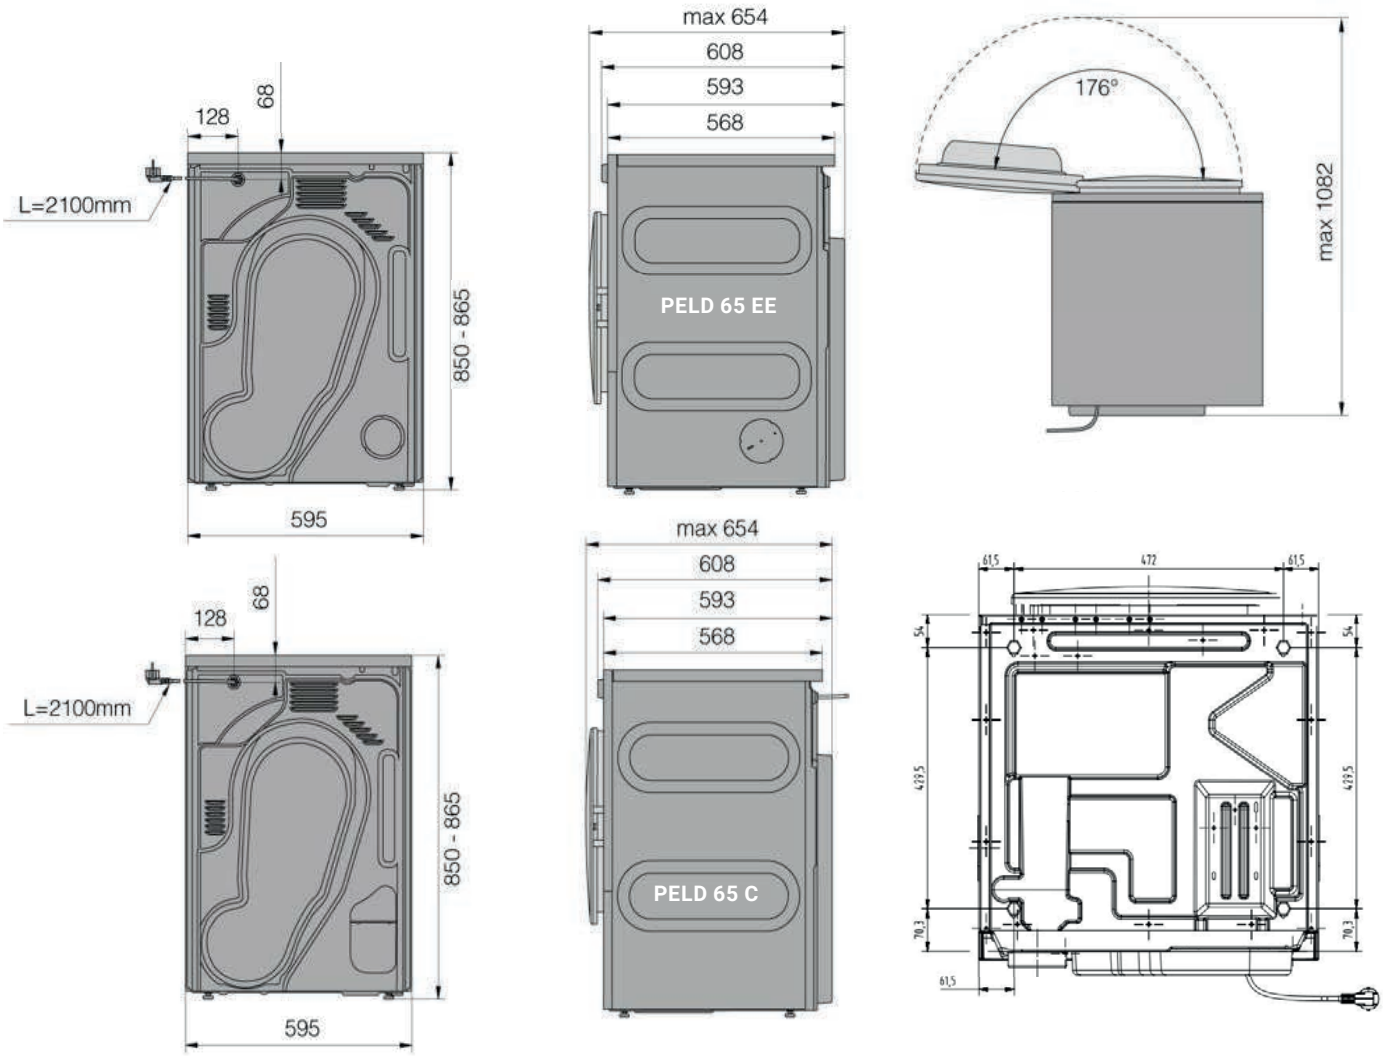

Rubber feet maximum height 150 mm


100 mm = 3.93 inch. - factor conversion 1 / 25,4

PELW65EDP.01 - PELW65EDV.01 - PELW80EDP.01 - PELW80EDV.01 - The information, technical data and features in this document are subject to change without notice. When printed or saved locally, data may be out of date.

TECHNICAL DATA	PELD 80 EE	PELD 80 HP
• Capacity 1:18 - 1:20	8,1 - 7,3 Kg (19 - 16 lb)	8,1 - 7,3 Kg (19 - 16 lb)
• Drum volume	145 lt	145 lt
• Hater type	Electric	Electric
• Door hinge position	Right (Reversible)	Right (Reversible)
• Vent air\smokes Ø (if foreseen)	102 mm	-
• Exhaust air flow (Version EE)	152 mc/h	-
• Max counterpressure EE (Version EE)	75,6 Pa	-
• Machine dimensions: WxDxH (100 mm = 3.93 inch.)	595×769×850-865 mm	595×769×850-865 mm
• Net weight	42,4 Kg (93,4 lb)	57,4 Kg (126,5 lb)
• Packing dimension: WxDxH (100 mm = 3.93 inch.)	640×840×920 mm	640×838×920 mm
• Gross weight	47 Kg (103,6 lb)	62 Kg (137 lb)
• Packaging volume	0,49 mc (16.9 ft³)	0,49 mc (16.9 ft³)
• Supply cable length	2100 mm (82.7 inch.)	2100 mm (82.7 inch.)
• STD. packed machines in to 20′ container	44 pz. Stacked	44 pz. Stacked
• STD. packed machines in to 40′ container	94z. Stacked	94 pz. Stacked

Variant (code)	80EE / 80HP A / A	80 EE E	80EE / 80HP G / G[b]	80 EE H	80EE I
• Electrical connection	1ph 230 V / 1ph 230 V 50 Hz 50 Hz	3ph 440 V 60 Hz	3ph 440 V / 2ph 440 V 50 Hz 50 Hz	3ph 440 V 60 Hz	1ph 230 V 60 Hz
• Plug	Schuko	N/A	N/A	N/A	Schuko
• Installation electrical power (kW)	3,3 / 1,0	3,3	3,3 / 1,0	3,3	3,3
• Current (A)	16 / 10	10	10 / 10	10	16
• External transformer's box	- / N/A	-	- / Yes	-	-

External transformer's box dimension (where applicable) WxDxH: 286×226×210 mm

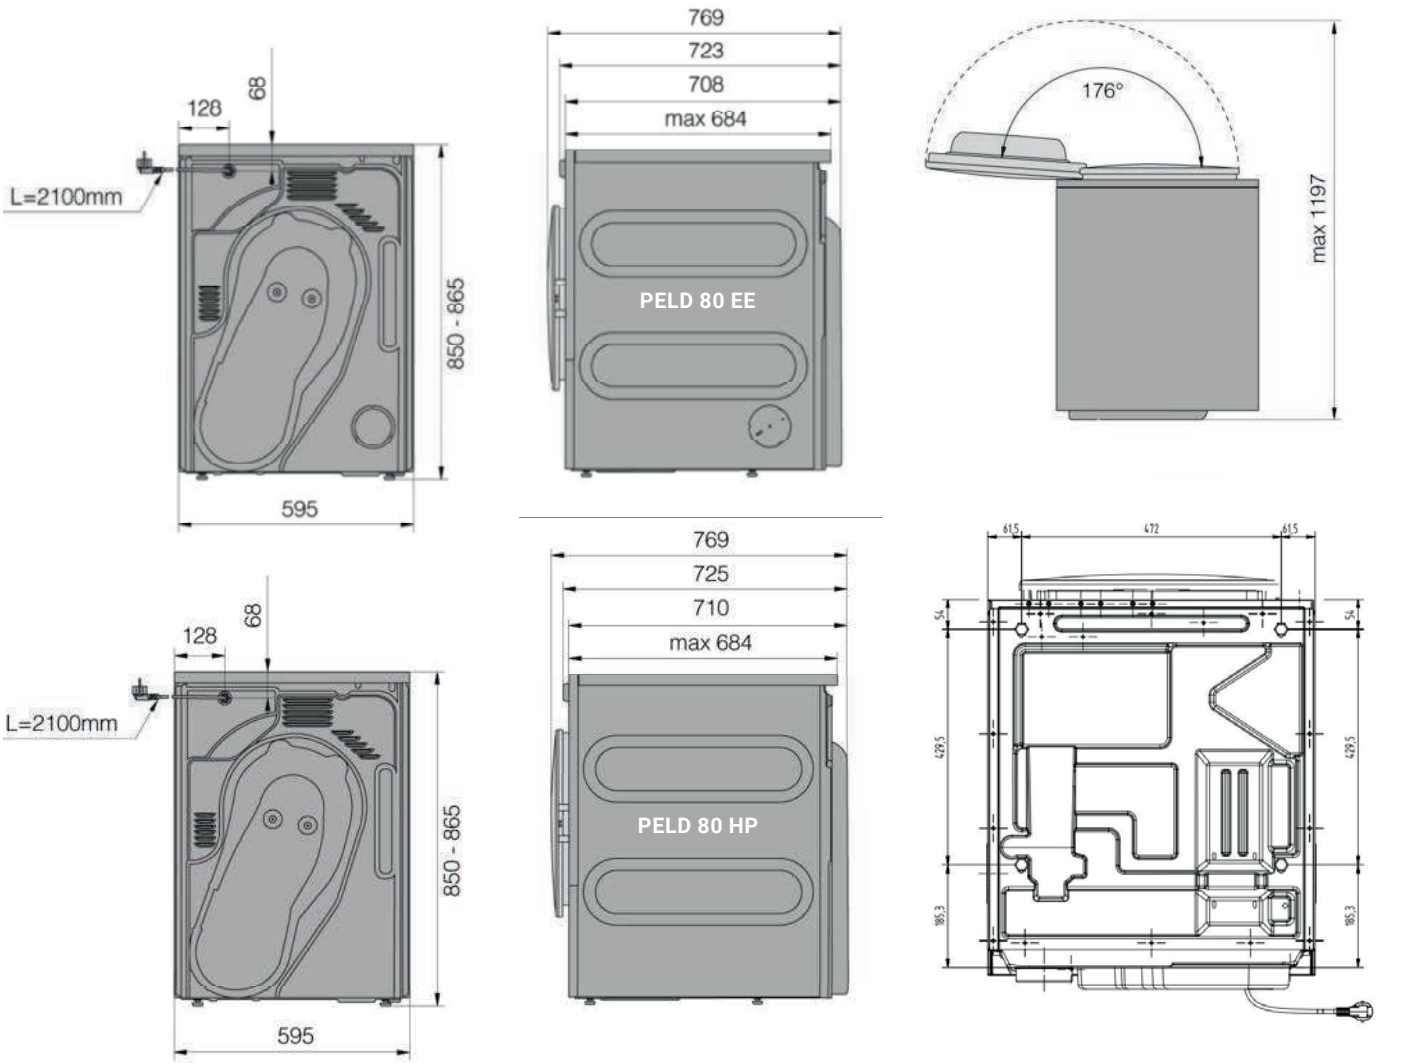

Rubber feet maximum height 150 mm

100 mm = 3.93 inch. - factor conversion 1 / 25,4

PELW65EDP.01 - PELW65EDV.01 - PELW80EDP.01 - PELW80EDV.01 - The information, technical data and features in this document are subject to change without notice. When printed or saved locally, data may be out of date.